

ESS 1000

EcoWater Series • Water Softener




Clean water.
Green future.

Enjoy Clean, Softened Water Throughout Your Home

Automatic Bypass

- 1 Electronic Timer**
Electronic timer controls regeneration frequency. Full menu-driven options.
 - 2 Multi-Wrap Reinforced Resin Tank**
High Density Polyethylene (HDPE) liner with an epoxy fiberglass composite winding. Doesn't deteriorate, rust, or corrode.
 - 3 Six Cycle Valve with Easy-Clamp Ring and Patented Teflon® Discs**
 - 4 Positive-Action Brine Valve**
Snap-together construction eliminates use of solvents that may contaminate water. Positive action helps prevent overfilling.
- 24-Volt Transformer**
Simplifies installation, maintenance and reduces electrical hazards.

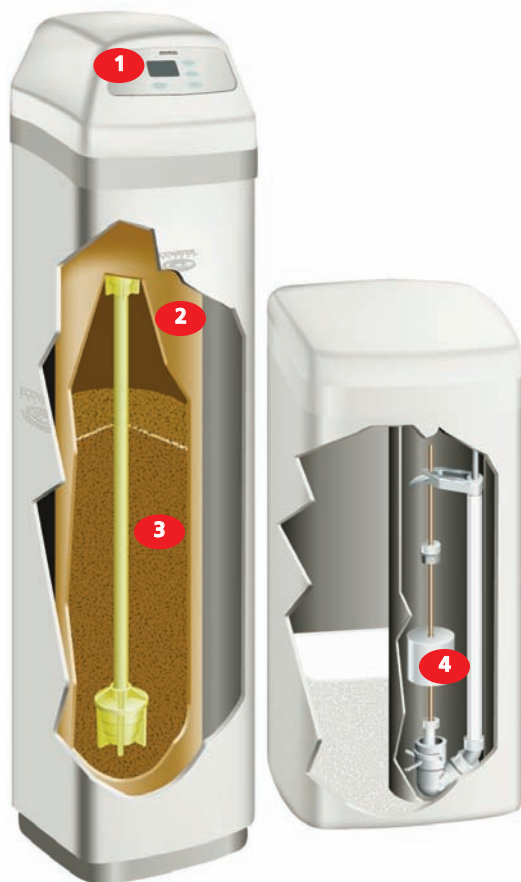

*Teflon is a registered trademark of DuPont.



ECOWATER
SYSTEMS®



SINCE 1925.

ECOWATER.CA

ESS 1000

Specifications


	ESS 1000XR24	ESS 1000XR32
Supply Water Pressure Limits (psi) ¹	20 - 125	20 - 125
Supply Water Temperature Limits (°F)	40 - 100	40 - 100
Service Flow Rate (gpm) ²	7.2	9
Water Used Each Regeneration (gal.) ³	30	41
Salt Storage Capacity (lbs.)	300	300
Electrical Rating (transformer provided)	24V-50/60Hz	24V-50/60Hz

¹Maximum pressure for Canadian use is 7.0 Kg/cm²

²Not to exceed 15 psi pressure loss

³When operated at 35 psi water pressure

Dimensions

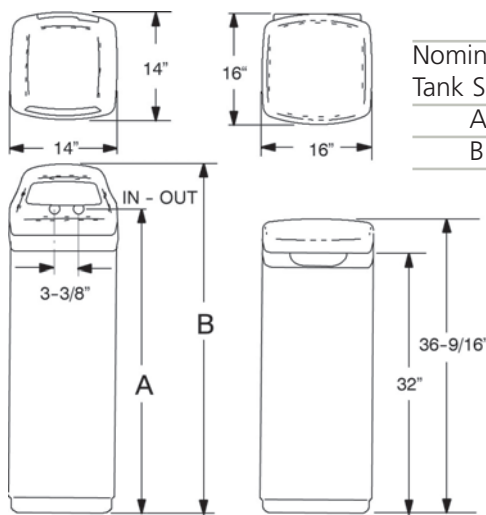

	ESS 1000XR24	ESS 1000XR32
Nominal Resin Tank Size	8" Dia. x 40"	10" Dia. x 47"
A	41.6"	49.8"
B	48.75"	56.6"



Your Authorized EcoWater Dealer:



EcoWater Canada Ltd. 5240 Bradco Blvd. Mississauga, Ontario Canada L4W 1G7

850701

02/08

Printed in Canada

EcoWater Canada Ltd.

ECOWATER.CA